


AUTHORITY DOES NOT PROVIDE BASEMENT SERVICE

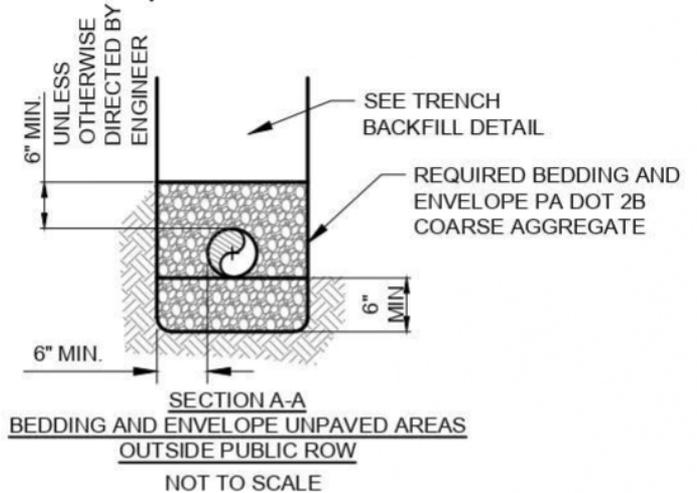

NOTES:

1. PIPE AND FITTINGS ARE TO BE GASKETED 4" SDR 26 PVC UNLESS NOTED.
2. REFER TO MANUFACTURER'S SPECIFICATIONS FOR MAXIMUM JOINT DEFLECTION (TYPICALLY ONE DEGREE FOR PVC).
3. REFER TO STANDARD CONSTRUCTION DETAIL PRA-S020 BEDDING AND ENVELOPE AND DETAIL PRA-S021 TRENCH BACKFILL. MATCH DESIGN TO LOCAL/STATE REQUIREMENTS.
4. PIPES PASSING THROUGH FOUNDATION WALLS SHALL HAVE A RELIEVING ARCH, OR A PIPE SLEEVE SHALL BE BUILT ONTO THE FOUNDATION WALL. THE PIPE SLEEVE SHALL BE TWO SIZES GREATER THAN THE PIPE PASSING THROUGH THE WALL.
5. PRIOR TO COVERING THE LATERAL FROM THE CO TO THE HOUSE, THE LATERAL SHALL BE VISUALLY INSPECTED AND TESTED (EXFILTRATION) WITH A COLUMN OF WATER 5 FEET ABOVE THE FIRST INVERT INTO THE HOUSE. LOW PRESSURE AIR TEST MAY BE USED WITH PRA APPROVAL.
6. WHEN ABOVE GRADE, CLEAN OUT PLUGS SHALL BE CAST IRON METAL OR APPROVED EQUAL.

SEWER LATERAL HOUSED CONNECTION DETAIL AND TESTING
NEW HOUSE WITH AN APPROVED STACK VENT

NOT TO SCALE

REVISED 02/24/2026

Pennoni
PENNONI ASSOCIATES INC.
 150 Ridge Road, Suite 2
 Sellersville, PA 18960
 T 215-257-5711 F 215-257-5766

NEW HOUSE CONNECTION
 PREPARED FOR:
PERKASIE REGIONAL AUTHORITY

DESIGNED BY:	JAR
CHECKED BY:	SRT
DATE:	4/04/96
DRAWING NO.	PRA-S014